



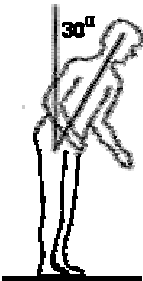


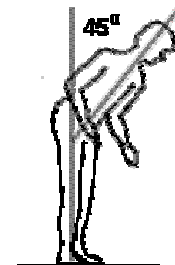

WAC 296-62-05174 Appendix B: Criteria for analyzing and reducing WMSD hazards for employers who choose the Specific Performance Approach.

For each "caution zone job" find any physical risk factors that apply. Reading across the page, determine if all of the conditions are present in the work activities. If they are, a WMSD hazard exists and must be reduced below the hazard level or to the degree technologically and economically feasible (see WAC 296-62-05130(4), specific performance approach).





Awkward Posture				Check (✓) here if this is a WMSD hazard
Body Part	Physical Risk Factor	Duration	Visual Aid	
Shoulders	Working with the hand(s) above the head or the elbow(s) above the shoulder(s)	More than 4 hours total per day		<input type="checkbox"/>
	Repetitively raising the hand(s) above the head or the elbow(s) above the shoulder(s) more than once per minute	More than 4 hours total per day		<input type="checkbox"/>
Neck	Working with the neck bent more than 45° (without support or the ability to vary posture)	More than 4 hours total per day		<input type="checkbox"/>
Back	Working with the back bent forward more than 30° (without support, or the ability to vary posture)	More than 4 hours total per day		<input type="checkbox"/>
	Working with the back bent forward more than 45° (without support or the ability to vary posture)	More than 2 hours total per day		<input type="checkbox"/>

WAC 296-62-05174 Appendix B: Criteria for analyzing and reducing WMSD hazards for employers who choose the Specific Performance Approach.

Awkward Posture (continued)			
Body Part	Physical Risk Factor	Duration	Visual Aid
Knees	Squatting	More than 4 hours total per day	
	Kneeling	More than 4 hours total per day	

Check (✓) here if this is a WMSD hazard

WAC 296-62-05174 Appendix B: Criteria for analyzing and reducing WMSD hazards for employers who choose the Specific Performance Approach.

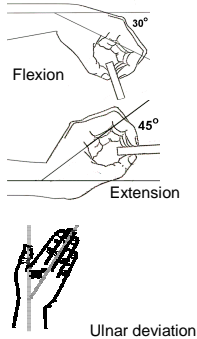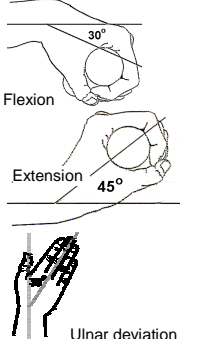

High Hand Force				
Body Part	Physical Risk Factor	Combined with	Duration	Visual Aid
Arms, wrists, hands	Pinching an unsupported object(s) weighing 2 or more pounds per hand, or pinching with a force of 4 or more pounds per hand (comparable to pinching half a ream of paper)	Highly repetitive motion	More than 3 hours total per day	
		Wrists bent in flexion 30° or more, or in extension 45° or more, or in ulnar deviation 30° or more	More than 3 hours total per day	
		No other risk factors	More than 4 hours total per day	
Arms, wrists, hands	Gripping an unsupported object(s) weighing 10 or more pounds per hand, or gripping with a force of 10 pounds or more per hand (comparable to clamping light duty automotive jumper cables onto a battery)	Highly repetitive motion	More than 3 hours total per day	
		Wrists bent in flexion 30° or more, or in extension 45° or more, or in ulnar deviation 30° or more	More than 3 hours total per day	
		No other risk factors	More than 4 hours total per day	

Check (✓) here if this is a WMSD hazard

WAC 296-62-05174 Appendix B: Criteria for analyzing and reducing WMSD hazards for employers who choose the Specific Performance Approach.

Highly Repetitive Motion			
Body Part	Physical Risk Factor	Combined with	Duration
Neck, shoulders, elbows, wrists, hands	Using the same motion with little or no variation every few seconds (excluding keying activities)	No other risk factors	More than 6 hours total per day
	Using the same motion with little or no variation every few seconds (excluding keying activities)	Wrists bent in flexion 30° or more, or in extension 45° or more, or in ulnar deviation 30° or more AND High, forceful exertions with the hand(s)	More than 2 hours total per day
	Intensive keying	Awkward posture, including wrists bent in flexion 30° or more, or in extension 45° or more, or in ulnar deviation 30° or more	More than 4 hours total per day
		No other risk factors	More than 7 hours total per day

Check (✓) here if this is a WMSD hazard

Repeated Impact			
Body Part	Physical Risk Factor	Duration	Visual Aid
Hands	Using the hand (heel/base of palm) as a hammer more than once per minute	More than 2 hours total per day	
Knees	Using the knee as a hammer more than once per minute	More than 2 hours total per day	

Check (✓) here if this is a WMSD hazard

WAC 296-62-05174 Appendix B: Criteria for analyzing and reducing WMSD hazards for employers who choose the Specific Performance Approach.


Heavy, Frequent or Awkward Lifting

This analysis only pertains if you have "caution zone jobs" where employees lift 10 lbs. or more (see WAC 296-62-05105, Heavy, Frequent, or Awkward Lifting) and you have chosen the specific performance approach.

Step 1 Find out the actual weight of objects that the employee lifts.

Actual Weight = _____ lbs.

Step 2 Determine the Unadjusted Weight Limit. Where are the employee's hands when they begin to lift or lower the object? Mark that spot on the diagram below. The number in that box is the Unadjusted Weight Limit in pounds.

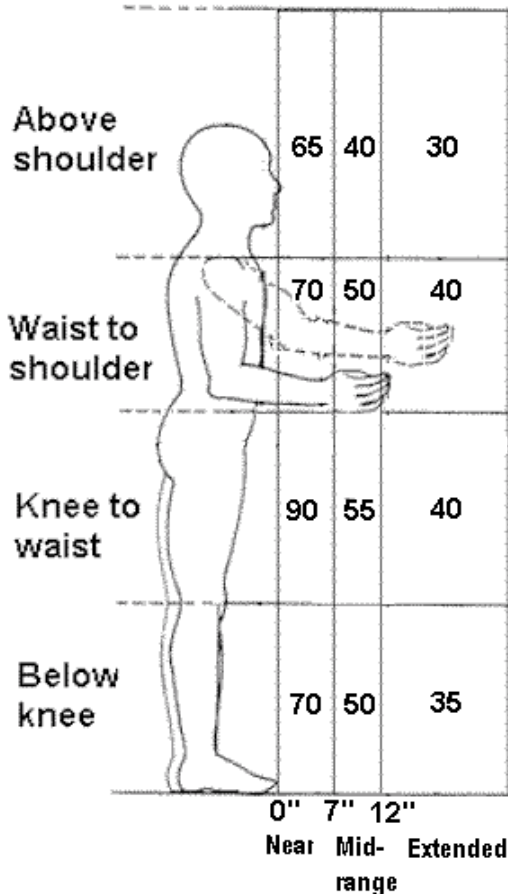

Unadjusted Weight Limit: _____ lbs.

Step 3 Find the Limit Reduction Modifier. Find out how many times the employee lifts per minute and the total number of hours per day spent lifting. Use this information to look up the Limit Reduction Modifier in the table below.

How many lifts per minute?	For how many hours per day?		
	1 hr or less	1 hr to 2 hrs	2 hrs or more
1 lift every 2-5 mins.	1.0	0.95	0.85
1 lift every min	0.95	0.9	0.75
2-3 lifts every min	0.9	0.85	0.65
4-5 lifts every min	0.85	0.7	0.45
6-7 lifts every min	0.75	0.5	0.25
8-9 lifts every min	0.6	0.35	0.15
10+ lifts every min	0.3	0.2	0.0

Note: For lifting done less than once every five minutes, use 1.0

Limit Reduction Modifier: _____

Step 4 Calculate the Weight Limit. Start by copying the Unadjusted Weight Limit from Step 2.

Unadjusted Weight Limit: = _____ lbs.

If the employee twists more than 45 degrees while lifting, reduce the Unadjusted Weight Limit by multiplying by 0.85. Otherwise, use the Unadjusted Weight Limit

Twisting Adjustment: = _____

Adjusted Weight Limit: = _____ lbs.

Multiply the Adjusted Weight Limit by the Limit Reduction Modifier from Step 3 to get the Weight Limit.

Limit Reduction Modifier: _____

Weight Limit: = _____ lbs.

Step 5 Is this a hazard? Compare the Weight Limit calculated in Step 4 with the Actual Weight lifted from Step 1. If the Actual Weight lifted is greater than the Weight Limit calculated, then the lifting is a WMSD hazard and must be reduced below the hazard level or to the degree technologically and economically feasible.

Note: If the job involves lifts of objects with a number of different weights and/or from a number of different locations, use Steps 1 through 5 above to:

- Analyze the two worst case lifts -- the heaviest object lifted and the lift done in the most awkward posture.
- Analyze the most commonly performed lift. In Step 3, use the frequency and duration for all of the lifting done in a typical workday.

WAC 296-62-05174 Appendix B: Criteria for analyzing and reducing WMSD hazards for employers who choose the Specific Performance Approach.

Hand-Arm Vibration

Use the instructions below to determine if a hand-arm vibration hazard exists.


Step 1. Find the vibration value for the tool. (Get it from the manufacturer, look it up at this web site: <http://umetech.niwl.se/vibration/HAVHome.html>, or you may measure the vibration yourself). The vibration value will be in units of meters per second squared (m/s^2). On the graph below find the point on the left side that is equal to the vibration value.

Note: You can also link to this web site through the L&I WISHA Services Ergonomics web site: <http://www.lni.wa.gov/wisha/ergo>

Step 2. Find out how many total hours per day the employee is using the tool and find that point on the bottom of the graph.

Step 3. Trace a line in from each of these two points until they cross.

Step 4. If that point lies in the crosshatched "Hazard" area above the upper curve, then the vibration hazard must be reduced below the hazard level or to the degree technologically and economically feasible. If the point lies between the two curves in the "Caution" area, then the job remains as a "Caution Zone Job." If it falls in the "OK" area below the bottom curve, then no further steps are required.

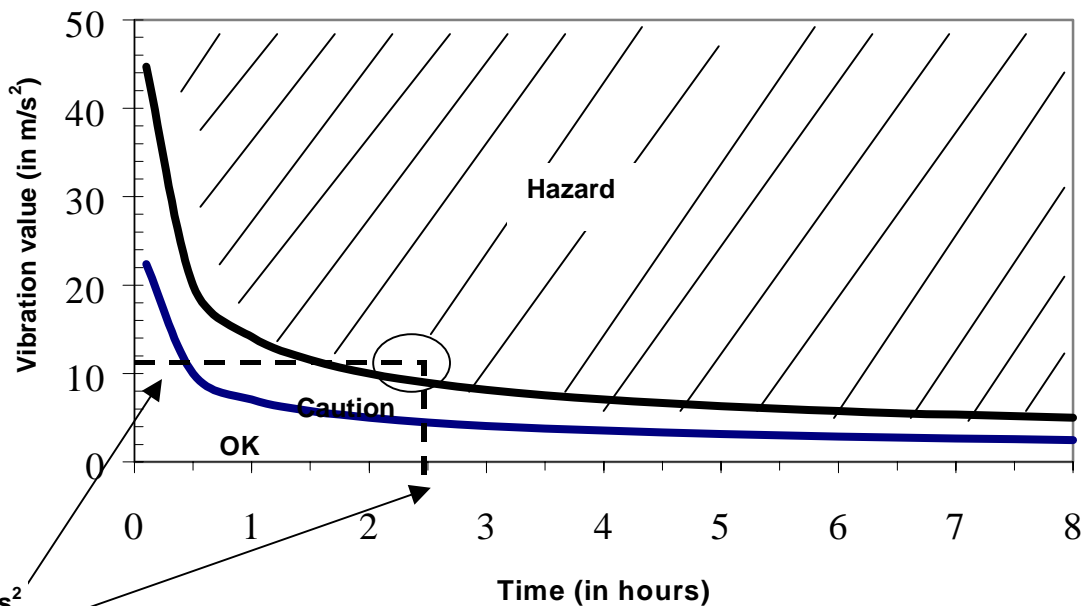

Example:
An impact wrench with a vibration value of $12 m/s^2$ is used for $2\frac{1}{2}$ hours total per day. The exposure level is in the Hazard area. The vibration must be reduced below the hazard level or to the degree technologically and economically feasible.

Note: The caution limit curve (bottom) is based on an 8-hour energy-equivalent frequency-weighted acceleration value of $2.5 m/s^2$. The hazard limit curve (top) is based on an 8-hour energy-equivalent frequency-weighted acceleration value of $5 m/s^2$.